

# Security

... more than an operations topic

Alexander Reelsen  
@spinscale  
alex@elastic.co



# Who owns application security?

 Operations?

 Developers?

 Intruder?

 CISO?

100 All of the above - and more...

# Internal Stakeholders

- 🌿 Application Developers
- 🌿 Platform Administrators
- 🌿 3rd Party Integrators
- 🌿 Quality Management
- 🌿 Compliance & Legal



# Internal Stakeholders

 **Application Developers**

 Platform Administrators

 3rd Party Integrators

 Quality Management


 Compliance & Legal

today's topic






elastic

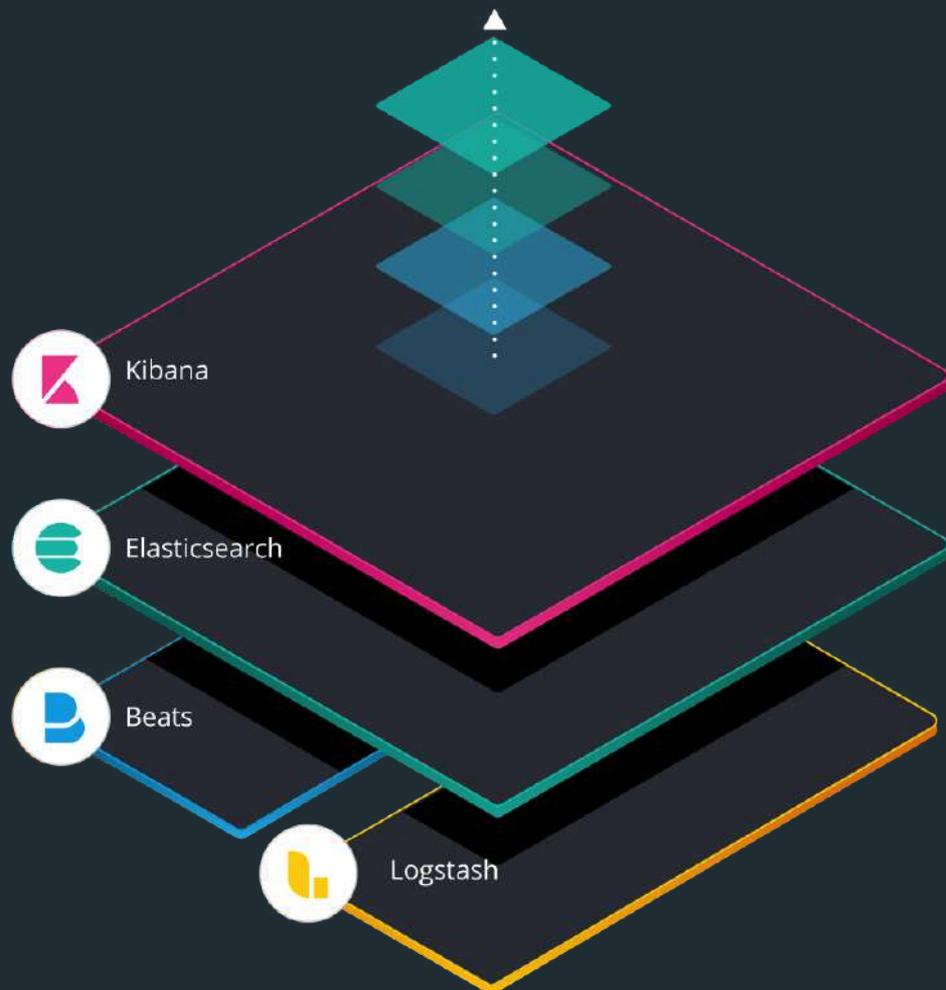

# today's topic

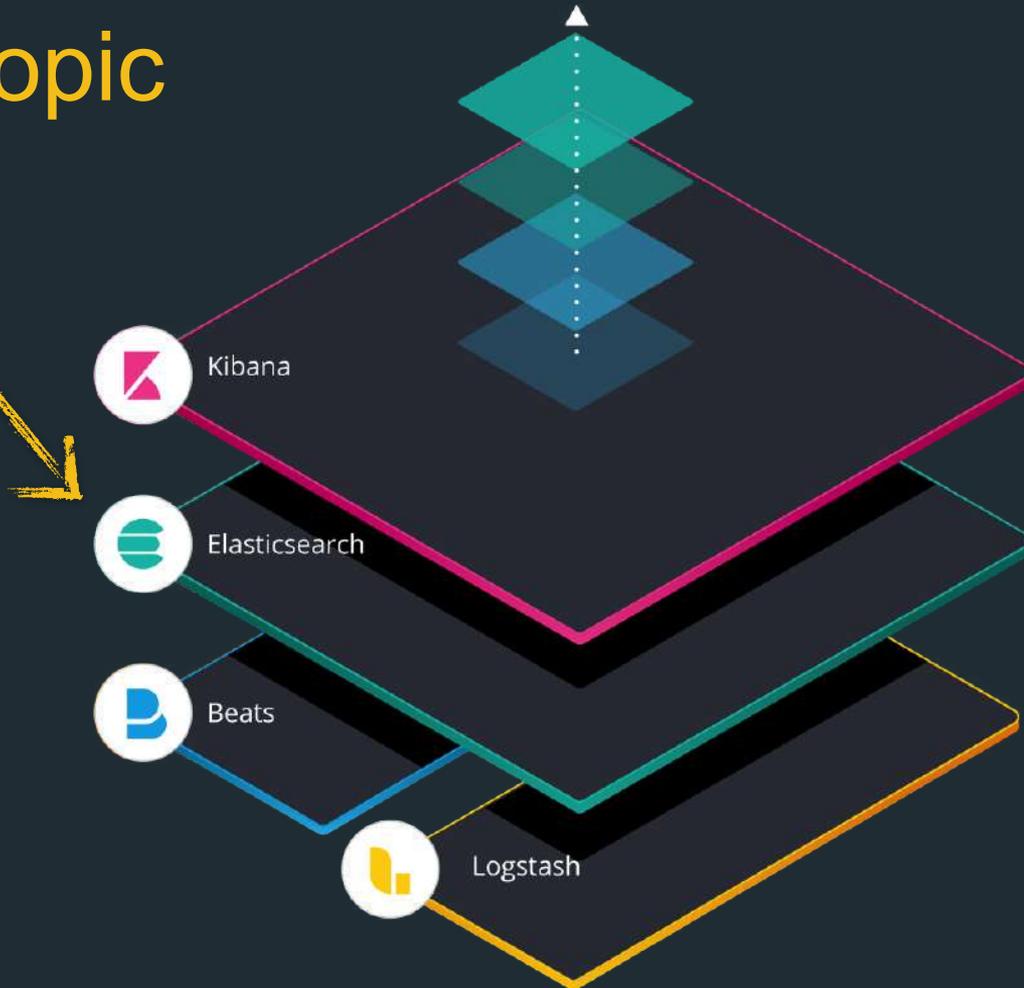

# Elasticsearch in 10 seconds

- 🌿 Search Engine (FTS, Analytics, Geo), real-time
- 🌿 Distributed, scalable, highly available, resilient
- 🌿 Interface: HTTP & JSON
- 🌿 Centrepiece of the Elastic Stack
- 🌿 Uneducated conservative guess: Tens of thousands of clusters worldwide, hundreds of thousands of instances

# Today's goal

**Improve security in your own apps!**



# Naming is hard

- 🍄 Security vs. Safety vs. Resiliency
- 🍄 Do not run as root
- 🍄 Integrity checks
- 🍄 `OutOfMemoryException`
- 🍄 `System.exit`
- 🍄 Stop writing data before running out of disk space

# Agenda

- 🍄 Sandboxing your code
- 🍄 Sandboxing others people's code
- 🍄 Prevent system call executions
- 🍄 Ensure a smooth ride into production



# Sandbox

**Sandboxing all the code!**



# What is a sandbox?

Your code

```
connect 192.168.1.1:9300
```



```
write /var/log/elasticsearch.log
```



```
unlink /var/lib/elasticsearch/...
```



# What is a sandbox?

Your code


`open /etc/passwd`

`connect bitcoin-miner.foo.bar`

`unlink /var/lib/elasticsearch`



# What is a sandbox?

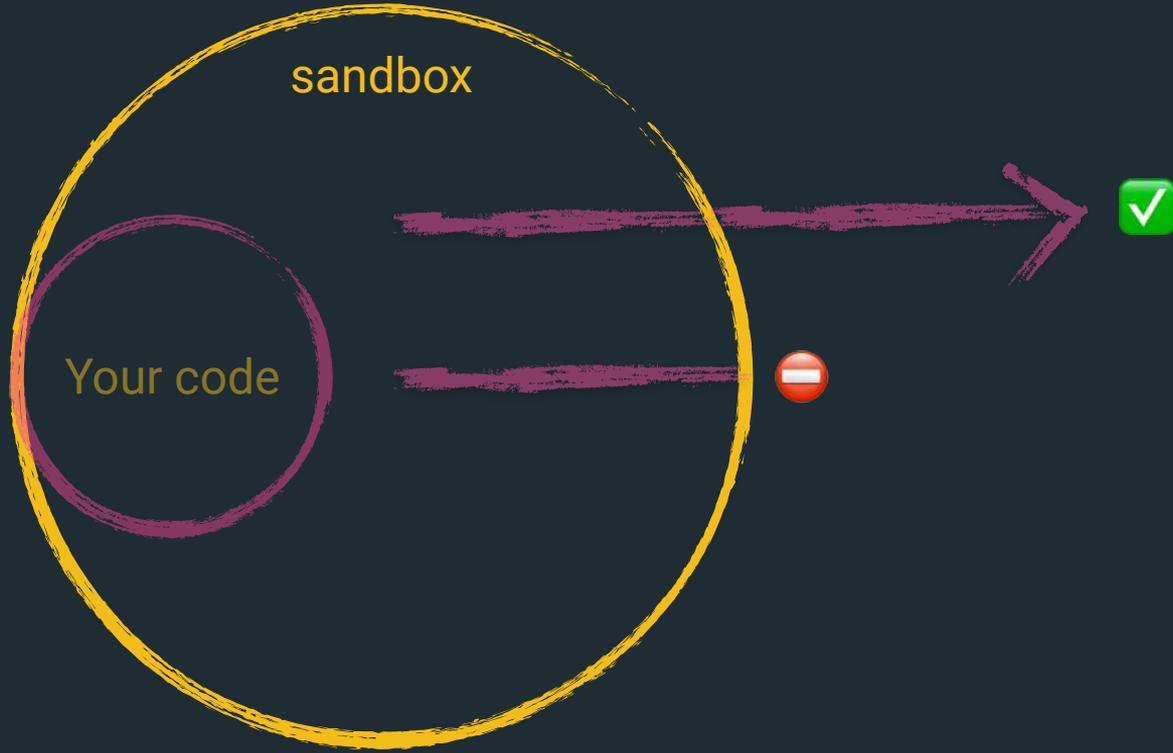

# Sandbox my own code?!



- 🍄 Expect your code to be exploited
- 🍄 Prevent unknown attack vectors
- 🍄 Is it really your code being executed
- 🍄 Simple security model
- 🍄 Blocklist vs. allowlist




# Java Security Manager



# Java Security Manager

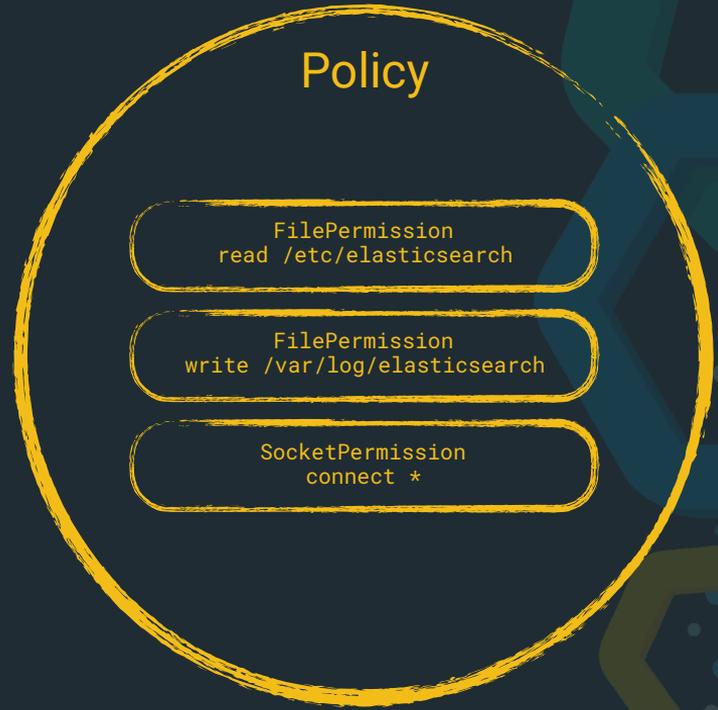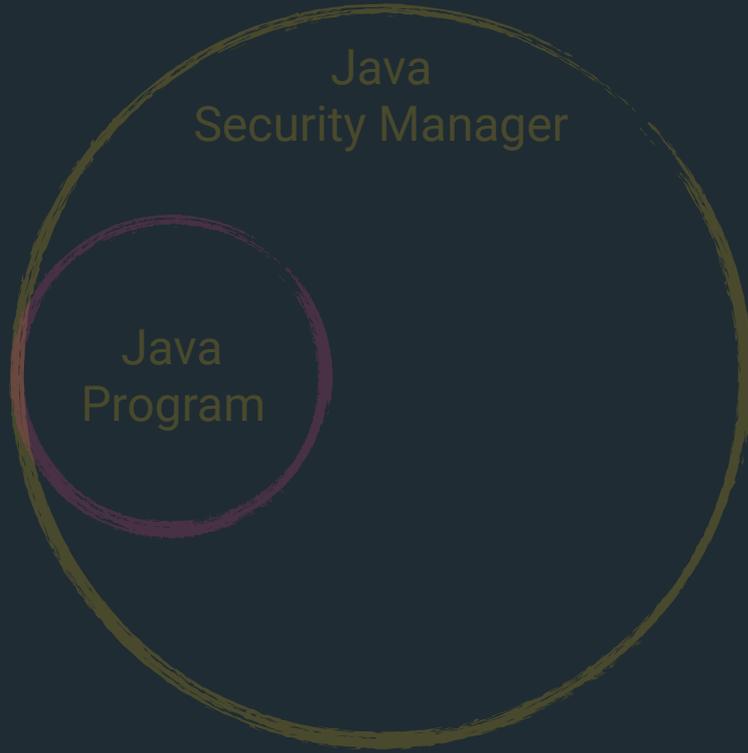

# Java Security Manager

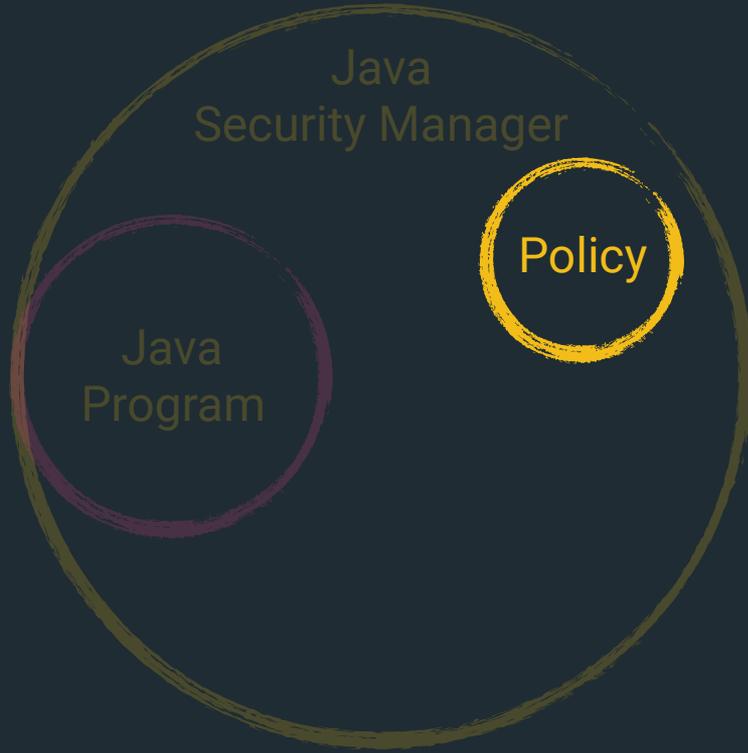

# Java Security Manager



```
grant {  
    // needed to do crazy reflection  
    permission java.lang.RuntimePermission "accessDeclaredMembers";  
};
```

# Java Security Manager

Java  
Security Manager

Policy

```
grant {  
  // needed to generate runtime classes  
  permission java.lang.RuntimePermission "createClassLoader";  
  
  // expression runtime  
  permission org.elasticsearch.script.ClassPermission "java.lang.String";  
  permission org.elasticsearch.script.ClassPermission "org.apache.lucene.expressions.Expression";  
  permission org.elasticsearch.script.ClassPermission "org.apache.lucene.search.DoubleValues";  
  // available functions  
  permission org.elasticsearch.script.ClassPermission "java.lang.Math";  
  permission org.elasticsearch.script.ClassPermission "org.apache.lucene.util.MathUtil";  
  permission org.elasticsearch.script.ClassPermission "org.apache.lucene.util.SloppyMath";  
};
```

# Java Security Manager


Java  
Security Manager

Policy

Java

```
grant codeBase "${codebase.netty-common}" {  
    // for reading the system-wide configuration for the backlog of established sockets  
    permission java.io.FilePermission "/proc/sys/net/core/somaxconn", "read";  
  
    // netty makes and accepts socket connections  
    permission java.net.SocketPermission "*", "accept,connect";  
};  
  
grant codeBase "${codebase.netty-transport}" {  
    // Netty NioEventLoop wants to change this, because of https://bugs.openjdk.java.net/browse/JDK-6427854  
    // the bug says it only happened rarely, and that its fixed, but apparently it still happens rarely!  
    permission java.util.PropertyPermission "sun.nio.ch.bugLevel", "write";  
};
```

# Java Security Manager

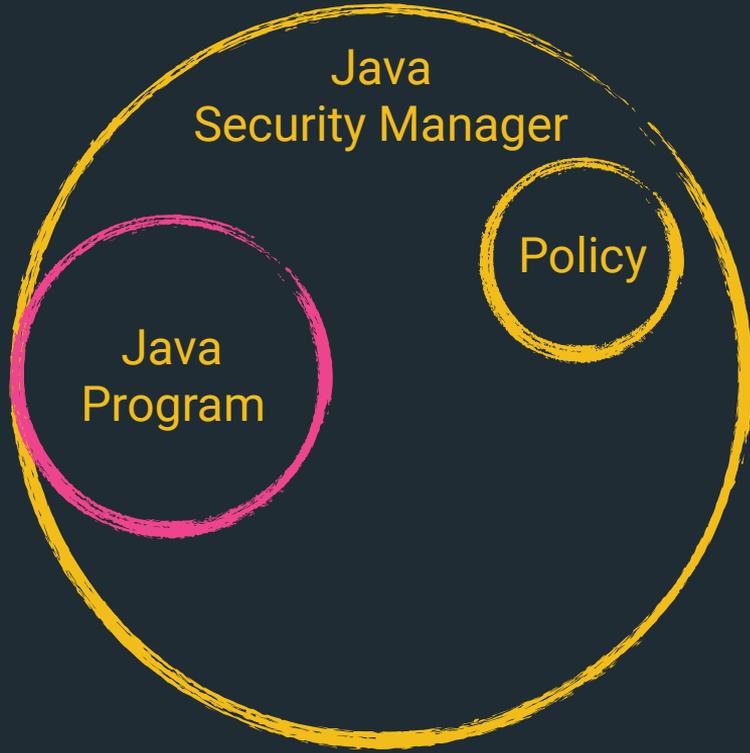

# java.io.File

```
/**
 * Tests whether the file or directory denoted by this abstract pathname
 * exists.
 *
 * @return true if and only if the file or directory denoted
 * by this abstract pathname exists; false otherwise
 *
 * @throws SecurityException
 * If a security manager exists and its @link
 * java.lang.SecurityManager#checkRead(java.lang.String)
 * method denies read access to the file or directory
 */
public boolean exists() {
    SecurityManager security = System.getSecurityManager();
    if (security != null) {
        security.checkRead(path);
    }
    if (isInvalid()) {
        return false;
    }
    return ((fs.getBooleanAttributes(f: this) & FileSystem.BA_EXISTS) != 0);
}
```


# java.lang.SecurityManager

```
/**
 * Throws a SecurityException if the
 * calling thread is not allowed to read the file specified by the
 * string argument.
 * <p>
 * This method calls checkPermission with the
 * FilePermission(file,"read") permission.
 * <p>
 * If you override this method, then you should make a call to
 * super.checkRead
 * at the point the overridden method would normally throw an
 * exception.
 *
 * @param file the system-dependent file name.
 * @exception SecurityException if the calling thread does not have
 * permission to access the specified file.
 * @exception NullPointerException if the file argument is
 * null.
 * @see #checkPermission(java.security.Permission) checkPermission
 */
public void checkRead(String file) {
    checkPermission(new FilePermission(file,
        SecurityConstants.FILE_READ_ACTION));
}
```



# Security Manager Summary

- 🌀 Extensible
- 🌀 Requires knowledge of code execution within your dependencies!
- 🌀 Many dependencies are not tested with the security manager, resulting in unknown code paths executions
- 🌀 No OOM protection!
- 🌀 No stack overflow protection!
- 🌀 No protection against java agents

# Elasticsearch & the security manager

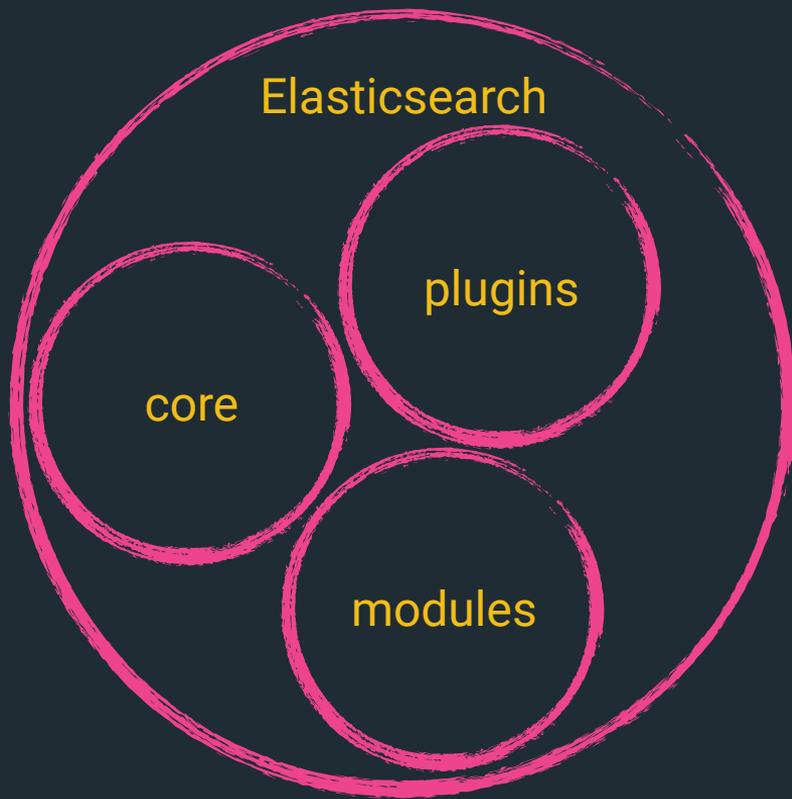

# Elasticsearch & the security manager

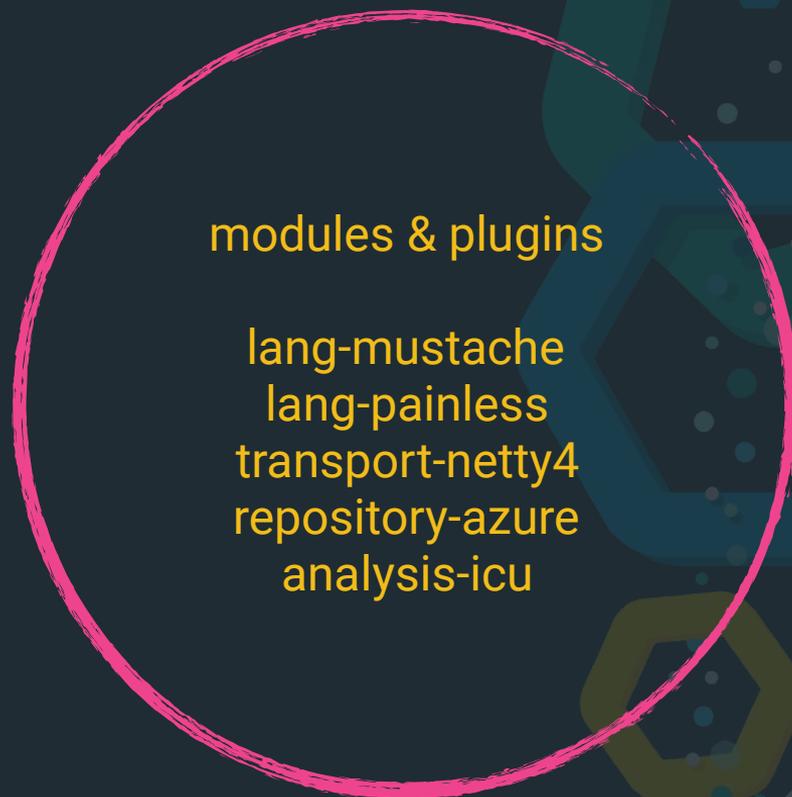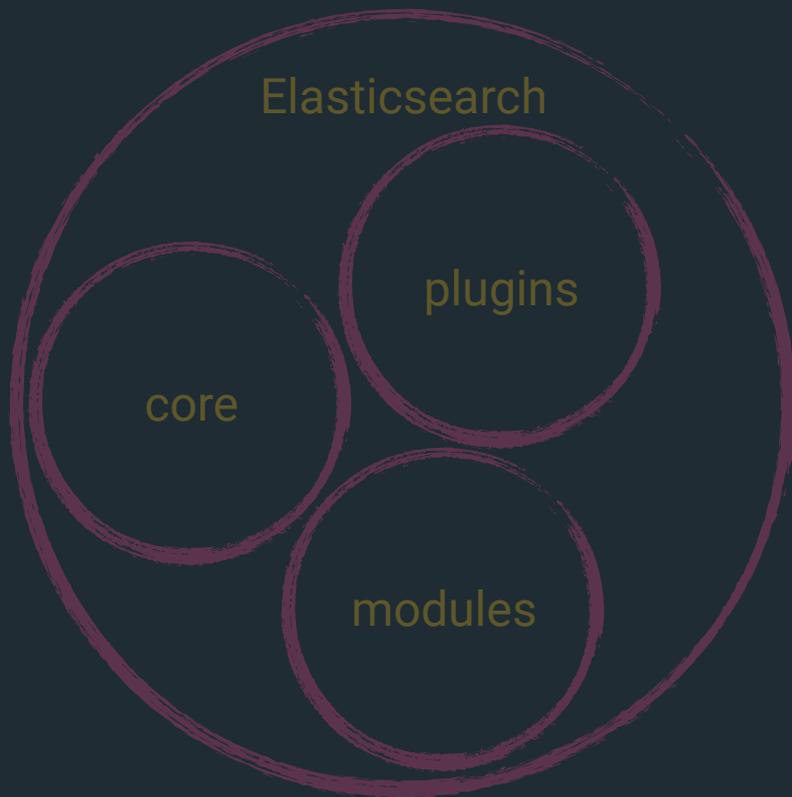


# Plugins & modules


- 🍷 plugins are just zip files
- 🍷 each can have its own jars/dependencies
- 🍷 each is loaded with its own classloader
- 🍷 each can have its own security permissions




# Plugins & modules

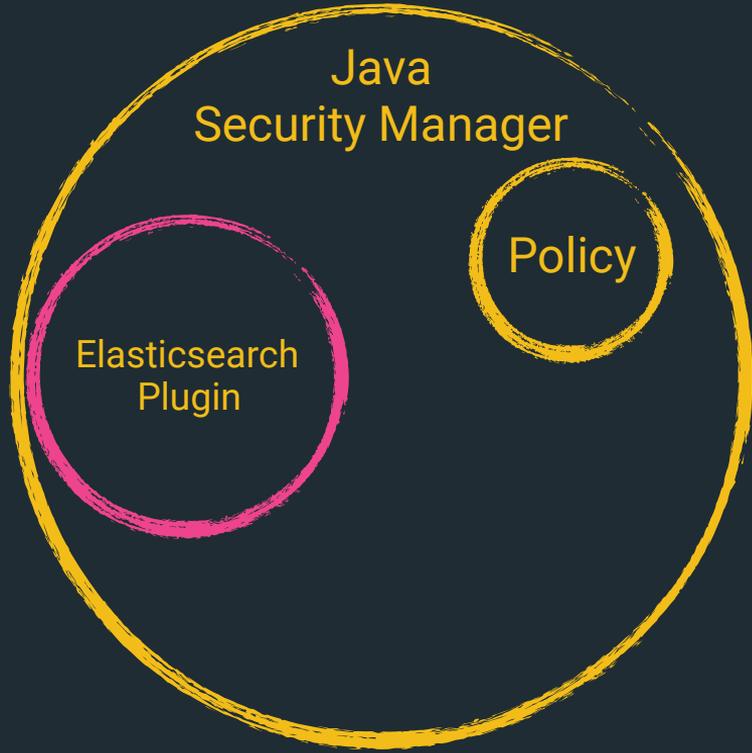

# Plugins & modules

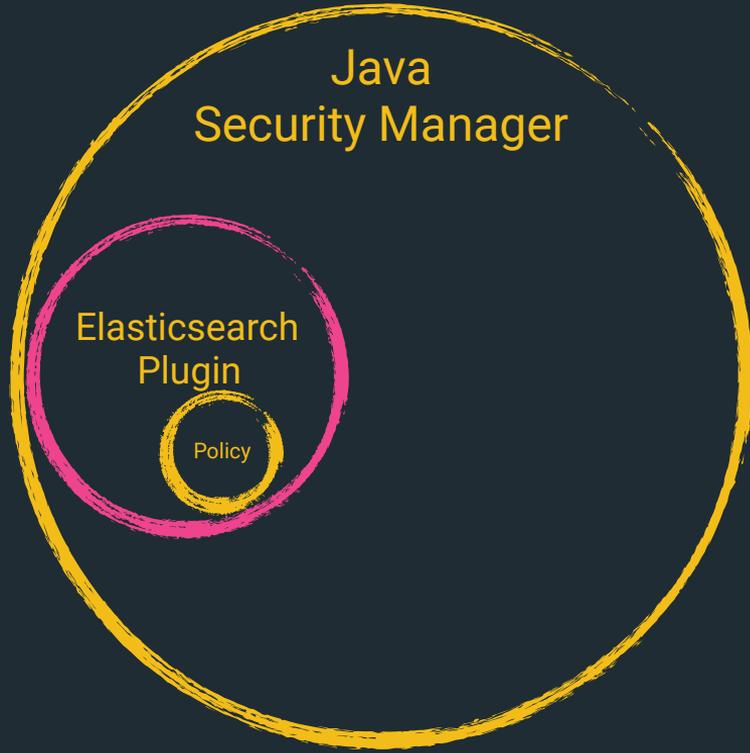

# Plugins & modules

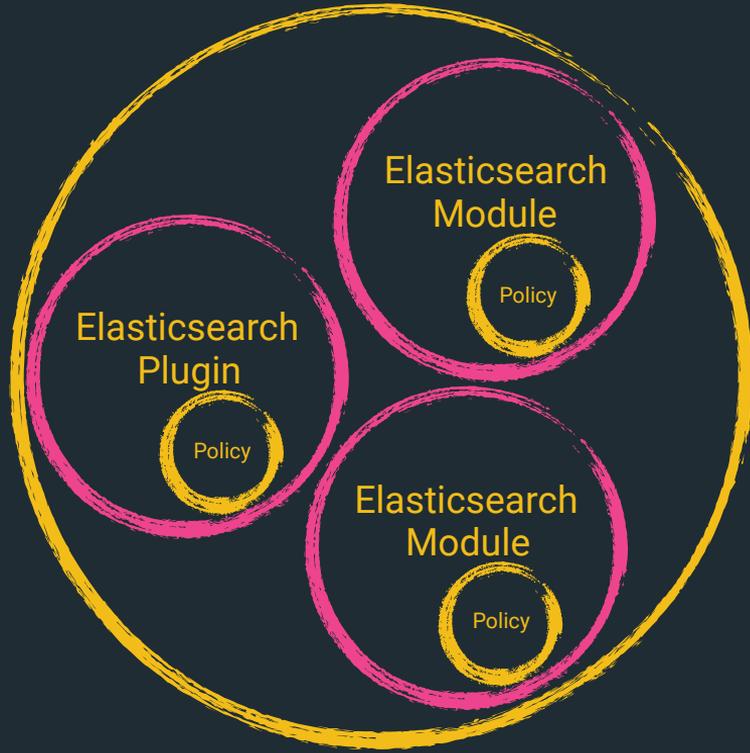

# Elasticsearch startup

JVM Startup



time



# Elasticsearch startup


JVM Startup

Read configuration file

time




# Elasticsearch startup

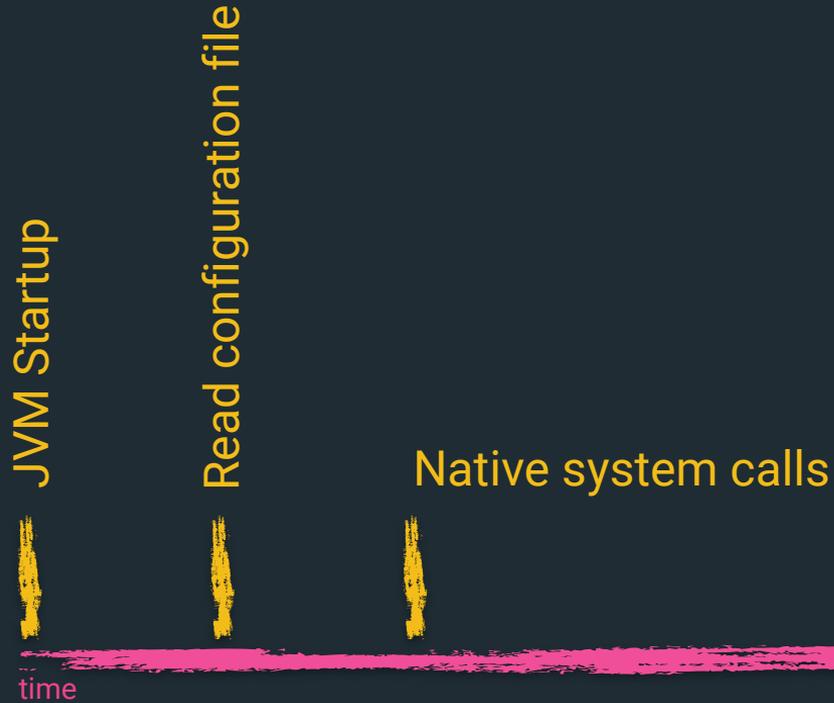

# Elasticsearch startup



# Elasticsearch startup

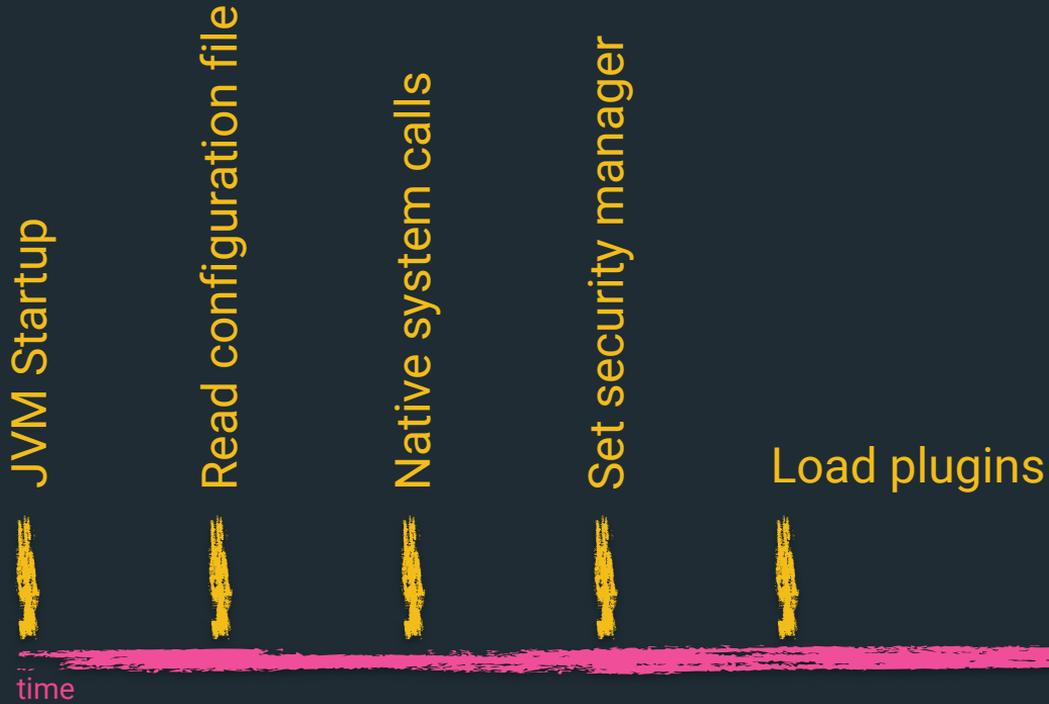

# Elasticsearch startup



# Elasticsearch startup



# Elasticsearch startup



# #noroot

there is no reason to run code as root!



# Do not run as root



# Do not run as root

```
/** Returns true if user is root, false if not, or if we don't know */
static boolean definitelyRunningAsRoot() {
    if (Constants.WINDOWS) {
        return false; // don't know
    }
    try {
        return JNACLibrary.geteuid() == 0;
    } catch (UnsatisfiedLinkError e) {
        // this will have already been logged by Kernel32Library, no need to repeat it
        return false;
    }
}
```

```
// check if the user is running as root, and bail
if (Natives.definitelyRunningAsRoot()) {
    throw new RuntimeException("can not run elasticsearch as root");
}
```

# seccomp

... or how I loved to abort system calls



# Seccomp - prevent process forks



# Seccomp - prevent process forks

- 🌿 Security manager could fail
- 🌿 Elasticsearch should still not be able to fork processes
- 🌿 One way transition to tell the operating system to deny `execve`, `fork`, `vfork`, `execveat` system calls
- 🌿 Works on Linux, Windows, Solaris, BSD, osx

# Seccomp - prevent process forks

```
// BPF installed to check arch, limit, then syscall.
// See https://www.kernel.org/doc/Documentation/prctl/seccomp\_filter.txt for details.
SockFilter insns[] = {
    /* 1 */ BPF_STMT( code: BPF_LD + BPF_W + BPF_ABS, SECCOMP_DATA_ARCH_OFFSET), //
    /* 2 */ BPF_JUMP( code: BPF_JMP + BPF_JEQ + BPF_K, arch.audit, jt: 0, jf: 7), // if (arch != audit) goto fail;
    /* 3 */ BPF_STMT( code: BPF_LD + BPF_W + BPF_ABS, SECCOMP_DATA_NR_OFFSET), //
    /* 4 */ BPF_JUMP( code: BPF_JMP + BPF_JGT + BPF_K, arch.limit, jt: 5, jf: 0), // if (syscall > LIMIT) goto fail;
    /* 5 */ BPF_JUMP( code: BPF_JMP + BPF_JEQ + BPF_K, arch.fork, jt: 4, jf: 0), // if (syscall == FORK) goto fail;
    /* 6 */ BPF_JUMP( code: BPF_JMP + BPF_JEQ + BPF_K, arch.vfork, jt: 3, jf: 0), // if (syscall == VFORK) goto fail;
    /* 7 */ BPF_JUMP( code: BPF_JMP + BPF_JEQ + BPF_K, arch.execve, jt: 2, jf: 0), // if (syscall == EXECVE) goto fail;
    /* 8 */ BPF_JUMP( code: BPF_JMP + BPF_JEQ + BPF_K, arch.execveat, jt: 1, jf: 0), // if (syscall == EXECVEAT) goto fail;
    /* 9 */ BPF_STMT( code: BPF_RET + BPF_K, SECCOMP_RET_ALLOW), // pass: return OK;
    /* 10 */ BPF_STMT( code: BPF_RET + BPF_K, k: SECCOMP_RET_ERRNO | (EACCES & SECCOMP_RET_DATA)), // fail: return EACCES;
};
```


# Seccomp - prevent process forks

```
// seccomp takes a long, so we pass it one explicitly to keep the JNA simple
SockFProg prog = new SockFProg(insns);
prog.write();
long pointer = Pointer.nativeValue(prog.getPointer());

int method = 1;
// install filter, if this works, after this there is no going back!
// first try it with seccomp(SECCOMP_SET_MODE_FILTER), falling back to prctl()
if (linux_syscall(arch.seccomp, SECCOMP_SET_MODE_FILTER, SECCOMP_FILTER_FLAG_TSYNC, new NativeLong(pointer)) != 0) {
    method = 0;
    int errno1 = Native.getLastError();
    if (logger.isDebugEnabled()) {
        logger.debug("message: \"seccomp(SECCOMP_SET_MODE_FILTER): {}, falling back to prctl(PR_SET_SECCOMP)...\",
            JNACLibrary.sterror(errno1));
    }
}
if (linux_prctl(PR_SET_SECCOMP, SECCOMP_MODE_FILTER, pointer, arg4: 0, arg5: 0) != 0) {
    int errno2 = Native.getLastError();
    throw new UnsupportedOperationException("seccomp(SECCOMP_SET_MODE_FILTER): " + JNACLibrary.sterror(errno1) +
        ", prctl(PR_SET_SECCOMP): " + JNACLibrary.sterror(errno2));
}
}

// now check that the filter was really installed, we should be in filter mode.
if (linux_prctl(PR_GET_SECCOMP, arg2: 0, arg3: 0, arg4: 0, arg5: 0) != 2) {
    throw new UnsupportedOperationException("seccomp filter installation did not really succeed. seccomp(PR_GET_SECCOMP): "
        + JNACLibrary.sterror(Native.getLastError()));
}
```

# seccomp sandbox

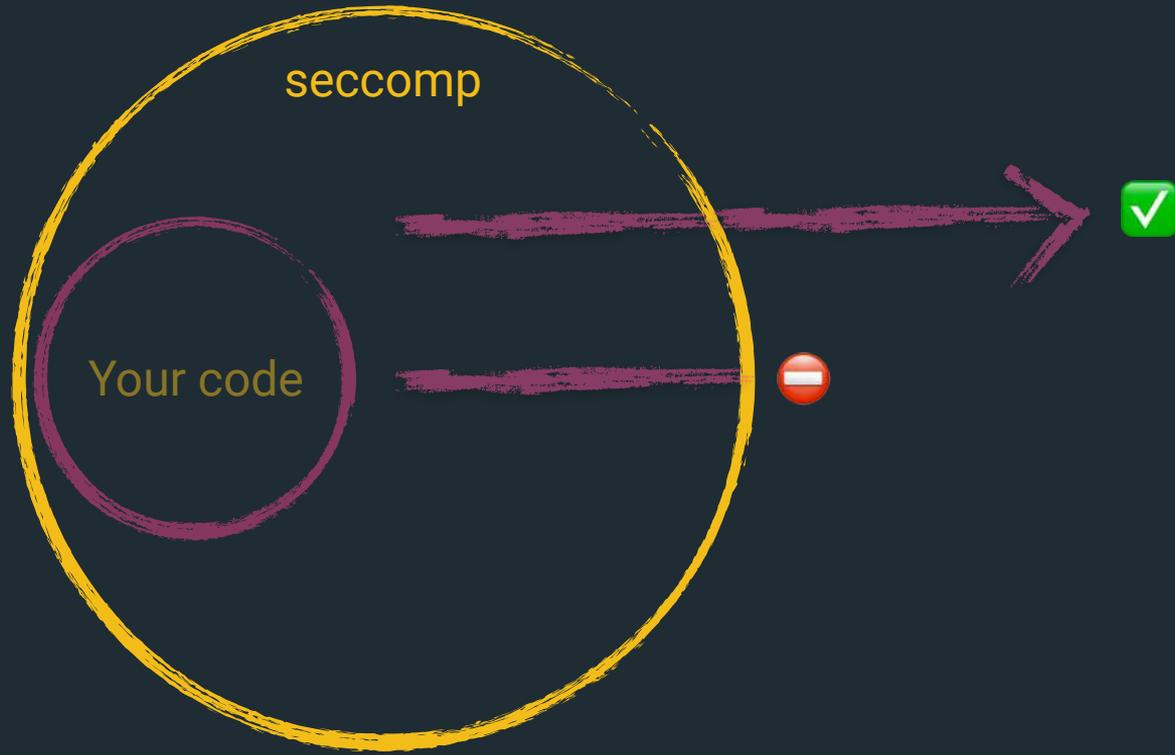

# bootstrap checks

Annoying you now instead of devastating you later



# Bootstrap checks



# Bootstrap checks

```
// the list of checks to execute
static List<BootstrapCheck> checks() {
    final List<BootstrapCheck> checks = new ArrayList<>();
    checks.add(new HeapSizeCheck());
    final FileDescriptorCheck fileDescriptorCheck
        = Constants.MAC_OS_X ? new OsXFileDescriptorCheck()
    checks.add(fileDescriptorCheck);
    checks.add(new MlockallCheck());
    if (Constants.LINUX) {
        checks.add(new MaxNumberOfThreadsCheck());
    }
    if (Constants.LINUX || Constants.MAC_OS_X) {
        checks.add(new MaxSizeVirtualMemoryCheck());
    }
    if (Constants.LINUX || Constants.MAC_OS_X) {
        checks.add(new MaxFileSizeCheck());
    }
    checks.add(new ClientJvmCheck());
    checks.add(new UseSerialGCCheck());
    checks.add(new SystemCallFilterCheck());
    checks.add(new OnErrorCheck());
    checks.add(new OnOutOfMemoryErrorCheck());
    checks.add(new EarlyAccessCheck());
    checks.add(new G1GCCheck());
    checks.add(new AllPermissionCheck());
    return Collections.unmodifiableList(checks);
}
```

# Bootstrap checks

```
static class FileDescriptorCheck implements BootstrapCheck {  
  
    private final int limit;  
  
    FileDescriptorCheck() { this(65535); }  
  
    protected FileDescriptorCheck(final int limit) {  
        if (limit <= 0) {  
            throw new IllegalArgumentException("limit must be positive but was [" + limit + "]);  
        }  
        this.limit = limit;  
    }  
  
    public final BootstrapCheckResult check(BootstrapContext context) {  
        final long maxFileDescriptorCount = getMaxFileDescriptorCount();  
        if (maxFileDescriptorCount != -1 && maxFileDescriptorCount < limit) {  
            final String message = String.format(  
                Locale.ROOT,  
                format:"max file descriptors [%d] for elasticsearch process is too low, increase to at least [%d]",  
                getMaxFileDescriptorCount(),  
                limit);  
            return BootstrapCheckResult.failure(message);  
        } else {  
            return BootstrapCheckResult.success();  
        }  
    }  
  
    // visible for testing  
    long getMaxFileDescriptorCount() { return ProcessProbe.getInstance().getMaxFileDescriptorCount(); }  
}
```

# Bootstrap checks

```
/**
 * Bootstrap check for versions of HotSpot that are known to have issues that can lead to index corruption when G1GC is enabled.
 */
static class G1GCCheck implements BootstrapCheck {

    @Override
    public BootstrapCheckResult check(BootstrapContext context) {
        if ("Oracle Corporation".equals(jvmVendor()) && isJava8() && isG1GCEnabled()) {
            final String jvmVersion = jvmVersion();
            // HotSpot versions on Java 8 match this regular expression; note that this changes with Java 9 after JEP-223
            final Pattern pattern = Pattern.compile("(\\d+)\\.?(\\d+)-b\\d+");
            final Matcher matcher = pattern.matcher(jvmVersion);
            final boolean matches = matcher.matches();
            assert matches : jvmVersion;
            final int major = Integer.parseInt(matcher.group(1));
            final int update = Integer.parseInt(matcher.group(2));
            // HotSpot versions for Java 8 have major version 25, the bad versions are all versions prior to update 40
            if (major == 25 && update < 40) {
                final String message = String.format(
                    Locale.ROOT,
                    format: "JVM version [%s] can cause data corruption when used with G1GC; upgrade to at least Java 8u40", jvmVersion);
                return BootstrapCheckResult.failure(message);
            }
        }
        return BootstrapCheckResult.success();
    }
}
```

# bonus: ease-of-use

don't forget your users...



# Mark sensitive settings

```
/**
 * Username for basic auth.
 */
public static final Setting.AffixSetting<String> AUTH_USERNAME_SETTING =
    Setting.affixKeySetting( prefix: "xpack.monitoring.exporters.", suffix: "auth.username",
        (key) -> Setting.simpleString(key, Property.Dynamic, Property.NodeScope, Property.Filtered));
/**
 * Password for basic auth.
 */
public static final Setting.AffixSetting<String> AUTH_PASSWORD_SETTING =
    Setting.affixKeySetting( prefix: "xpack.monitoring.exporters.", suffix: "auth.password",
        (key) -> Setting.simpleString(key, Property.Dynamic, Property.NodeScope, Property.Filtered));

private static final Setting.AffixSetting<SecureString> SETTING_URL_SECURE =
    Setting.affixKeySetting( prefix: "xpack.notification.slack.account.", suffix: "secure_url",
        (key) -> SecureSetting.secureString(key, fallback: null));
```



# Register all your settings

```
stacks/7.1.1/elasticsearch-7.1.1 bin/elasticsearch -Ecluster.namr=my-cluster
```



```
[2019-06-21T10:42:56,943][WARN ][o.e.b.ElasticsearchUncaughtExceptionHandler] [rhincodon] uncaught exception in thread [main]  
org.elasticsearch.bootstrap.StartupException: java.lang.IllegalArgumentException: unknown setting [cluster.namr] did you mean [cluster.name]?  
  at org.elasticsearch.bootstrap.Elasticsearch.init(Elasticsearch.java:163) ~[elasticsearch-7.1.1.jar:7.1.1]  
  at org.elasticsearch.bootstrap.Elasticsearch.execute(Elasticsearch.java:150) ~[elasticsearch-7.1.1.jar:7.1.1]  
  at org.elasticsearch.cli.EnvironmentAwareCommand.execute(EnvironmentAwareCommand.java:86) ~[elasticsearch-7.1.1.jar:7.1.1]
```



```
unknown setting [cluster.namr] did you mean [cluster.name]?
```

# Summary

**Security is hard - let's go shopping!**



# Summary

- 🍄 Development has big impact on security
- 🍄 Operations is happy to help what is there out of the box
- 🍄 Developers know their application best!
- 🍄 Don't reinvent, check out existing features!
- 🍄 Developers are responsible for writing secure code! Before something happens!

# Thanks for listening!

## Questions?

Alexander Reelsen  
@spinscale  
alex@elastic.co



# Resources

- 🌸 <https://github.com/elastic/elasticsearch/>
- 🌸 [https://www.elastic.co/blog/bootstrap\\_checks\\_annoying\\_instead\\_of\\_devastating](https://www.elastic.co/blog/bootstrap_checks_annoying_instead_of_devastating)
- 🌸 <https://www.elastic.co/blog/scripting>
- 🌸 <https://www.elastic.co/blog/scripting-security>
- 🌸 <https://docs.oracle.com/javase/9/security/toc.htm>
- 🌸 <https://docs.oracle.com/javase/9/security/permissions-java-development-kit.htm>
- 🌸 <https://www.elastic.co/blog/seccomp-in-the-elastic-stack>

# Thanks for listening!

## Questions?

Alexander Reelsen  
@spinscale  
alex@elastic.co

